


6MBP10VAA120-50

IGBT Modules

IGBT MODULE (V series) 1200V / 10A / IPM

■ Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs
- · Low power loss and soft switching
- · High performance and high reliability IGBT with overheating
- · Higher reliability because of a big decrease in number of parts in built-in control circuit



■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings (Tc=25°C, Vcc=15V unless otherwise specified)

Items		Symbol	Min.	Max.	Units
Collector-Emitter Voltage (*1)		Vces	0	1200	V
Short Circuit Voltage		Vsc	400	800	V
	DC	Ic	-	10	Α
Collector Current	1ms	I _{cp}	-	20	Α
	Duty=89% (*2)	-lc	-	10	Α
Collector Power Dissipation	1 device (*3)	Pc	-	97	W
Supply Voltage of Pre-Driver (*4)		Vcc	-0.5	20	V
Input Signal Voltage (*5)		Vin	-0.5	Vcc+0.5	V
Alarm Signal Voltage (*6)		V _{ALM}	-0.5	Vcc	V
Alarm Signal Current (*7)		I _{ALM}	-	20	mA
Junction Temperature		T _i	-	150	°C
Operating Case Temperature		Topr	-20	110	°C
Storage Temperature		T _{stg}	-40	125	°C
Solder Temperature (*8)		T _{sol}	-	260	°C
Isolating Voltage (*9)		V _{iso}	-	AC2500	Vrms
Screw Torque	Mounting (M4)	-	-	1.7	Nm

Note *1: V_{CES} shall be applied to the input voltage between terminal P-(U,V, W) and (U,V, W)-N. Note *2: $Duty=125^{\circ}C/R_{(h(J-c)D)}/(I_F\times V_F Max.)\times 100$

Note *3: Pc=125°C/Rth(j-c)Q

Note *4: Voc shall be applied to the input voltage between terminal No.3 and 1, 6 and 4, 9 and 7,11 and 10. Note *5: V_{II} shall be applied to the input voltage between terminal No.2 and 1, 5 and 4, 8 and 7,12~14 and 10.

Note *6: VALM shall be applied to the voltage between terminal No.15 and 10.

Note *7: I_{ALM} shall be applied to the input current to terminal No.15. Note *8: Immersion time 10±1sec. 1time

Note *9: Terminal to base, 50/60Hz sine wave 1min. All terminals should be connected together during the test.

● Electrical Characteristics (Tj=25°C, Vcc=15V unless otherwise specified)

Items		Symbol	Conditions		Min.	Тур.	Max.	Units
	Collector Current at off signal input	Ices	V _{CE} =1200V		-	-	1.0	mA
ē	Collector-Emitter saturation voltage	V _{CE(sat)}	Ic=10A	Terminal	-	-	2.05	V
	Conector-Emitter Saturation voitage			Chip	-	1.68	-	V
	Forward voltage of FWD	VF	I _F =10A	Terminal	-	-	2.55	V
				Chip	-	2.10	-	V
		ton	V _{DC} =600V, T _j =125°C, I _C =10A		1.1	-	-	μs
6,	vitahina tima	toff			-	-	2.1	μs
JV	Switching time		V _{DC} =600V, I _C =10A		-	-	0.3	μs
Sı	Supply current of P-side pre-driver (per one unit)		Switching Frequency= 0-15kHz		-	-	8	mA
Sı	Supply current of N-side pre-driver Ican Tc=-20~110°C		T _c =-20~110°C		-	-	18	mA
l.m.	Input signal threshold voltage		- V _{in} -GND	ON	1.2	1.4	1.6	V
III				OFF	1.5	1.7	1.9	V
O	Over Current Protection Level		T _j =125°C		15	-	-	Α
O	Over Current Protection Delay time		T _j =125°C		-	5	-	μs
Sł	Short Circuit Protection Delay time		T _j =125°C		-	2	3	μs
IG	BT Chips Over Heating Protection Temperature Level	Тјон	Surface of IGBT Chips		150	-	-	°C
O	ver Heating Protection Hysteresis	Тјн			-	20	-	°C
Ur	Under Voltage Protection Level				11.0	-	12.5	V
Ur	Under Voltage Protection Hysteresis				0.2	0.5	-	V
	Alarm Signal Hold Time		ALM OND		1.0	2.0	2.4	ms
Al			ALM-GND T _c =-20~110°C	Vcc≧10V	2.5	4.0	4.9	ms
			10 20 110 0		5.0	8.0	11.0	ms
Re	esistance for current limit	RALM			960	1265	1570	Ω

● Thermal Characteristics (T_c = 25°C)

Items			Symbol	Min.	Тур.	Max.	Units
lunction to Cook Thermal Besistance (*40)	Inverter	IGBT	R _{th(j-c)Q}	-	-	1.28	°C/W
Junction to Case Thermal Resistance (*10)		FWD	R _{th(j-c)D}	-	-	2.02	°C/W
Case to Fin Thermal Resistance with Compound			R _{th(c-f)}	-	0.05	-	°C/W

Note $^{\star}10$: For 1device, the measurement point of the case is just under the chip.


● Noise Immunity (V_{DC}=600V, V_{CC}=15V)

Items	Conditions	Min.	Тур.	Max.	Units
Common mode rectangular noise	Pulse width 1µs, polarity ±, 10 min. Judge : no over-current, no miss operating	±2.0	-	-	kV

Recommended Operating Conditions

Items	Symbol	Min.	Тур.	Max.	Units
DC Bus Voltage	V _{DC}	-	-	800	V
Power Supply Voltage of Pre-Driver	Vcc	13.5	15.0	16.5	V
Switching frequency of IPM	fsw	-	-	20	kHz
Arm shoot through blocking time for IPM's input signal	tdead	1.0	-	-	μs
Screw Torque (M4)	-	1.3	-	1.7	Nm


■ Block Diagram

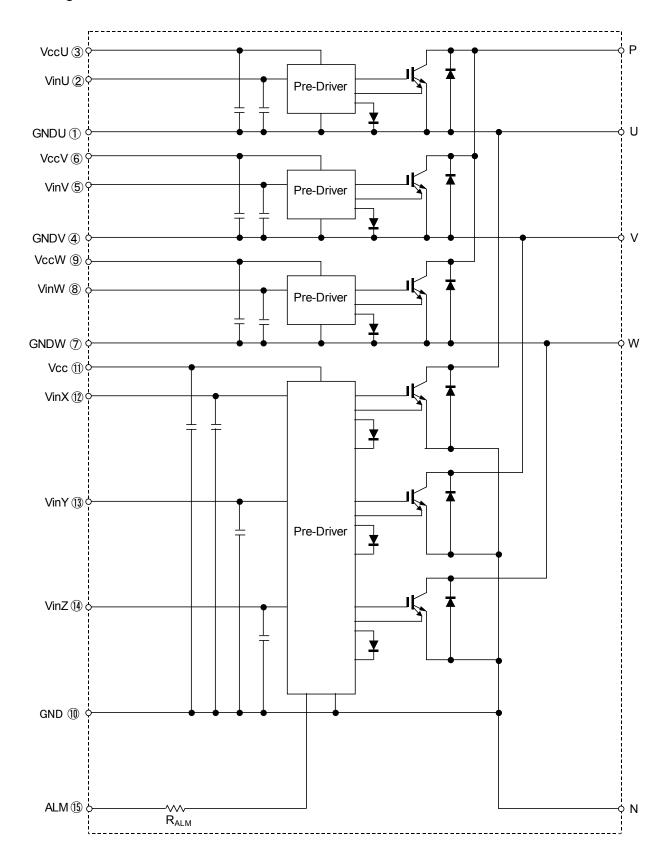



Pre-drivers include following functions


- 1. Amplifier for driver
- 2. Short circuit protection
- 3. Under voltage lockout circuit
- 4. Over current protection
- 5. IGBT chip over heating protection


■ Characteristics (Representative)



















Inverter














































■ Outline Drawings, mm





http://www.fujielectric.com/products/semiconductor/

WARNING

- 1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of May 2011. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sur to obtain the latest specifications.
- 2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
- 3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design failsafe, flame retardant, and free of malfunction.
- 4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 - Computers
- OA equipment
- Communications equipment (terminal devices)
- · Measurement equipment

- · Machine tools
- Audiovisual equipment
- Electrical home appliances
- Personal equipment Industrial robots etc.
- 5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
- Transportation equipment (mounted on cars and ships)
- Traffic-signal control equipment
- Emergency equipment for responding to disasters and anti-burglary devices
- · Medical equipment

- Trunk communications equipment
- · Gas leakage detectors with an auto-shut-off feature
- · Safety devices
- 6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
 - Space equipment

- Aeronautic equipment
- · Nuclear control equipment

- Submarine repeater equipment
- 7. Copyright ©1996-2011 by Fuji Electric Co., Ltd. All rights reserved. No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.
- 8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product. Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.